


Dimensions for wall backing plate installation

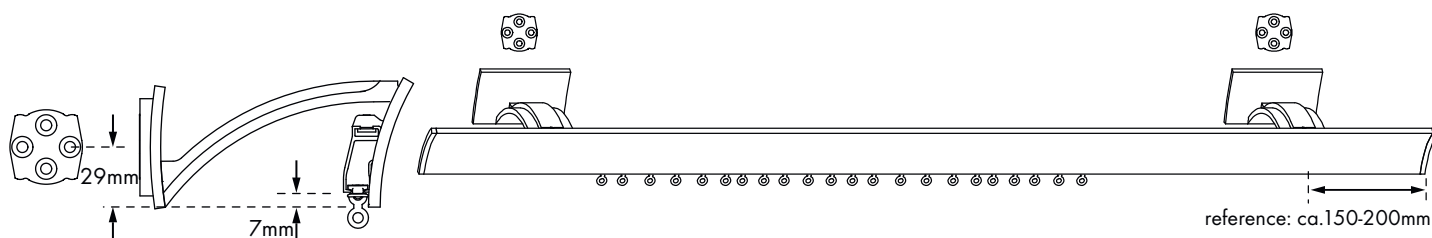


Do not take the glider out of the profile.

Do not remove the yellow lock until the end caps have been installed.

Installation procedure

1. Attach the brackets to the wall ①
2. Suspend the profile ④
3. Adjust the profile at the sides, ③ press on to the bracket and screw tight.
4. Screw on the end caps. ⑤

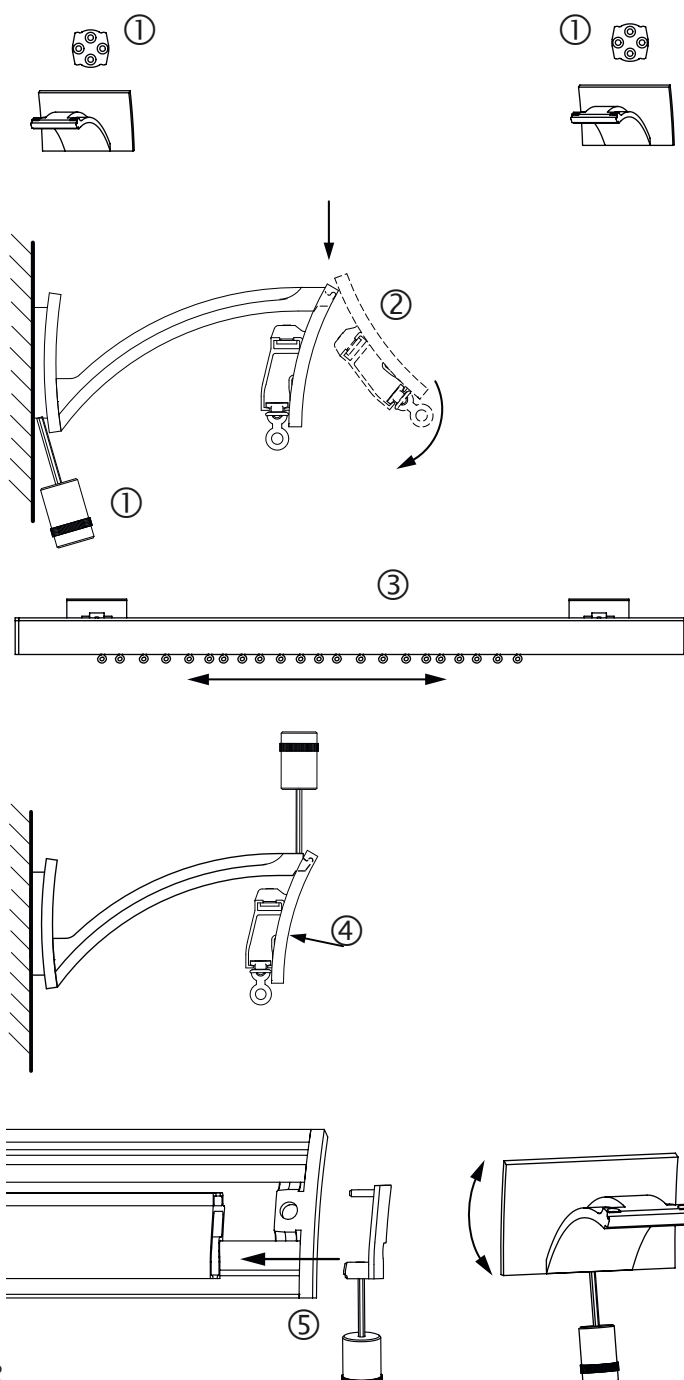

Bracket adjustable

Care Instructions

- Use the products in dry interior areas only.
- Remove dust deposits from time to time using a lightweight damp cloth.
- Do not use scouring agents, polish or cleaning products that contain solvents.